


.100	Header	.025 inch pin w/ .028 Rd Tail - 1/2/3 Row Low Profile	Straight	Thru Hole
------	--------	---	----------	-----------

.100 inch Center - .025 inch Square Pin with .028 inch Round Solder Tails - Low Profile Straight Header (use .031 inch holes)

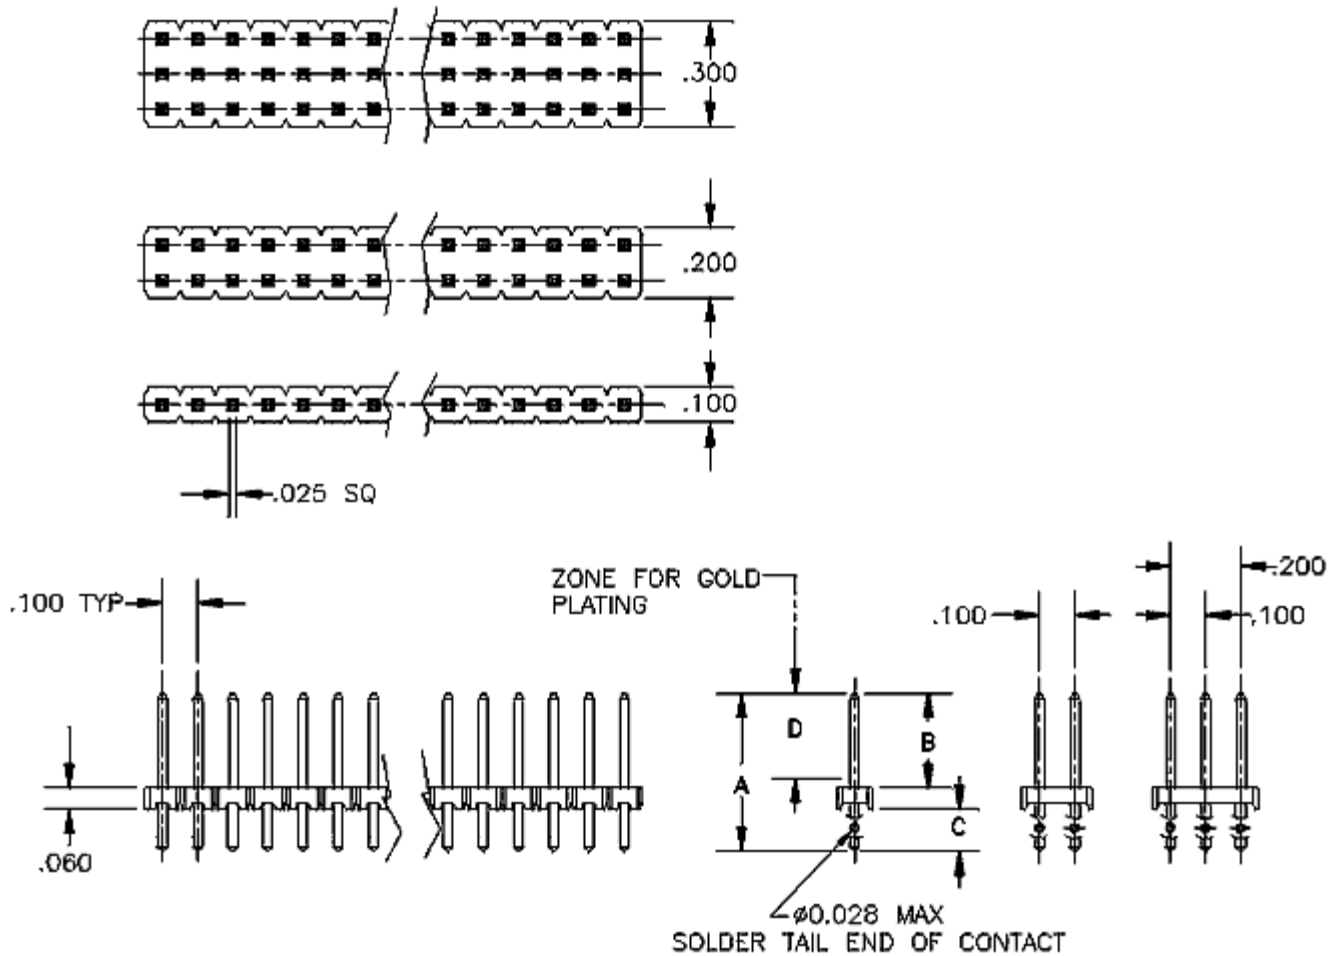

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
6961S 1 Row	8.38	0.330	3.43	0.135	3.43	0.135	3.81	0.150			G2 : T	2-40
6962S 2 Row	8.38	0.330	3.43	0.135	3.43	0.135	3.81	0.150			G2 : T	4-80
6963S 3 Row	8.38	0.330	3.43	0.135	3.43	0.135	3.81	0.150			G2 : T	3-120

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC

Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:

info@commcon.com