


2mm	Header	4 Row 120 Pin End of Stack Header (no socket)	4 Row	Thru Hole
-----	--------	--	-------	-----------

PC104-Plus - 120 position - 4 Row - use for last board in stack - does not have female socket

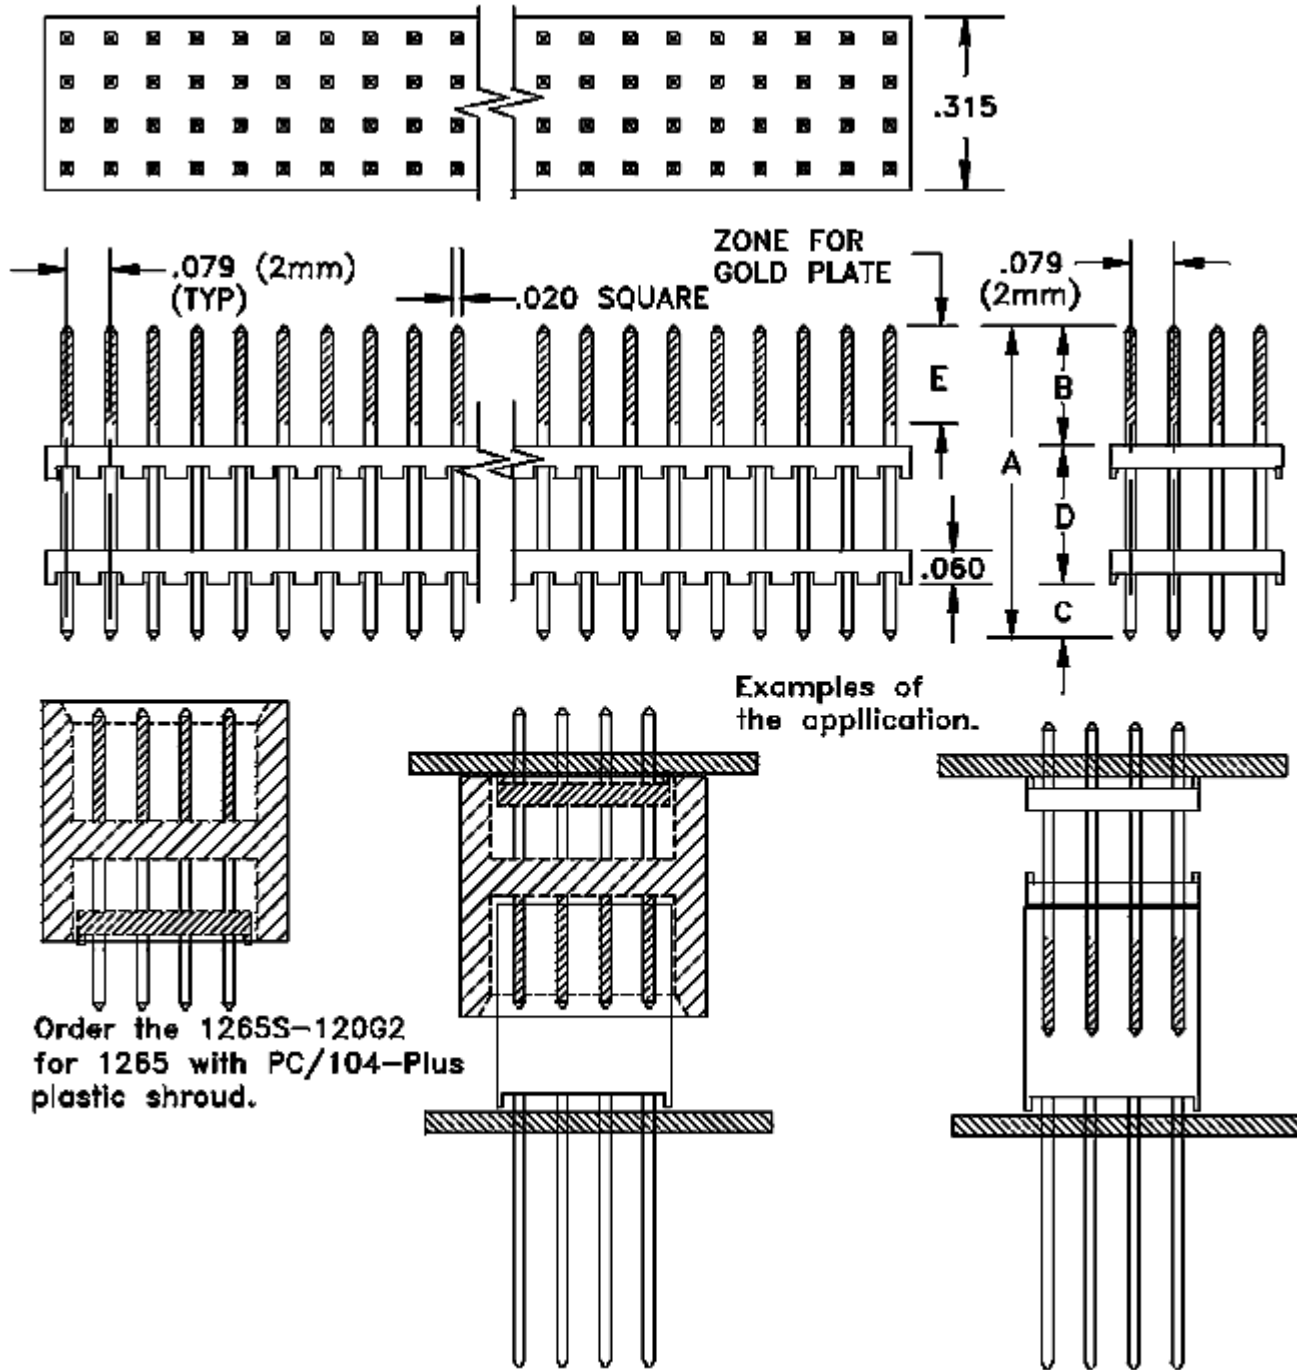

Order the 1265S-120G2 for 1265 with PC/104-Plus plastic shroud.

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>1265</b>	12.60	0.496	3.81	0.150	2.90	0.114	5.89	0.232	3.81	0.150	G2	120-4
<b>1265S</b> with shroud	12.60	0.496	3.81	0.150	2.90	0.114			3.81	0.150	G2	120-120

### Technical Notes

<b>Contact Material:</b>	Pin: Phosphor Bronz - .020 inch square - burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	2 amp continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Compatible

### ***COMM CON CONNECTORS INC.***

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)