


Use this browser's print function to print this entire page, then close this window.

Catalog Page 8-1

High Temperature Plastic

<b>.100</b>	<b>Header</b>	<b>Double Row - Low Profile</b>	<b>Rt Angle</b>	<b>Thru Hole</b>
-------------	---------------	---------------------------------	-----------------	------------------

.100 inch Center - .025 inch Square Pin - Low Profile - Double Row Right Angle Header

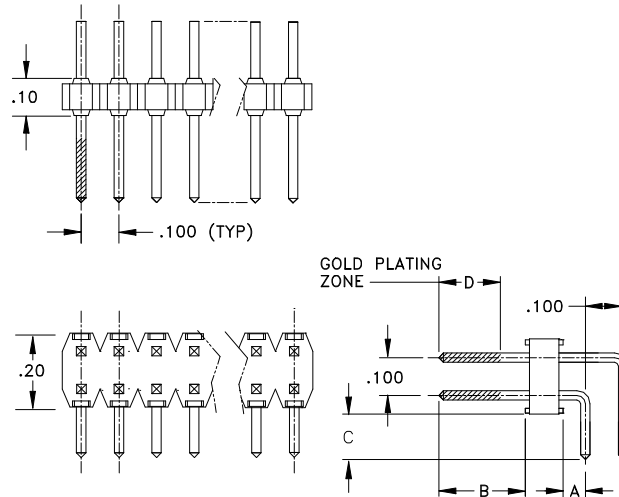

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>4723R</b>	1.52	0.060	8.08	0.318	5.84	0.230	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4712R</b>	1.52	0.060	5.84	0.230	8.13	0.320	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4707R</b>	1.52	0.060	5.84	0.230	10.67	0.420	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4714R</b>	1.52	0.060	5.84	0.230	13.21	0.520	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4705R</b>	1.52	0.060	8.08	0.318	3.30	0.130	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4717R</b>	1.52	0.060	5.84	0.230	15.75	0.620	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4704R</b>	1.52	0.060	5.84	0.230	5.59	0.220	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4701R</b>	1.52	0.060	5.84	0.230	3.05	0.120	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4719R</b>	4.06	0.160	5.84	0.230	3.05	0.120	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4703R</b>	4.06	0.160	5.84	0.230	5.59	0.220	5.84	0.230			G2LF : G1 : TLF	4-80
<b>4709R</b>	4.06	0.160	5.84	0.230	13.21	0.520	5.84	0.230			G2LF : G1 : TLF	4-80

<b>Technical Notes</b>	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b><i>COMM CON WORLDWIDE INC.</i></b>	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: <a href="mailto:info@commcon.com">info@commcon.com</a>	