
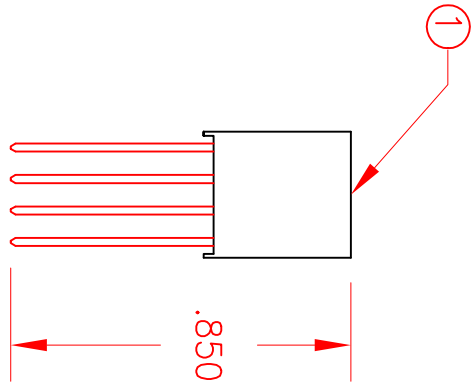
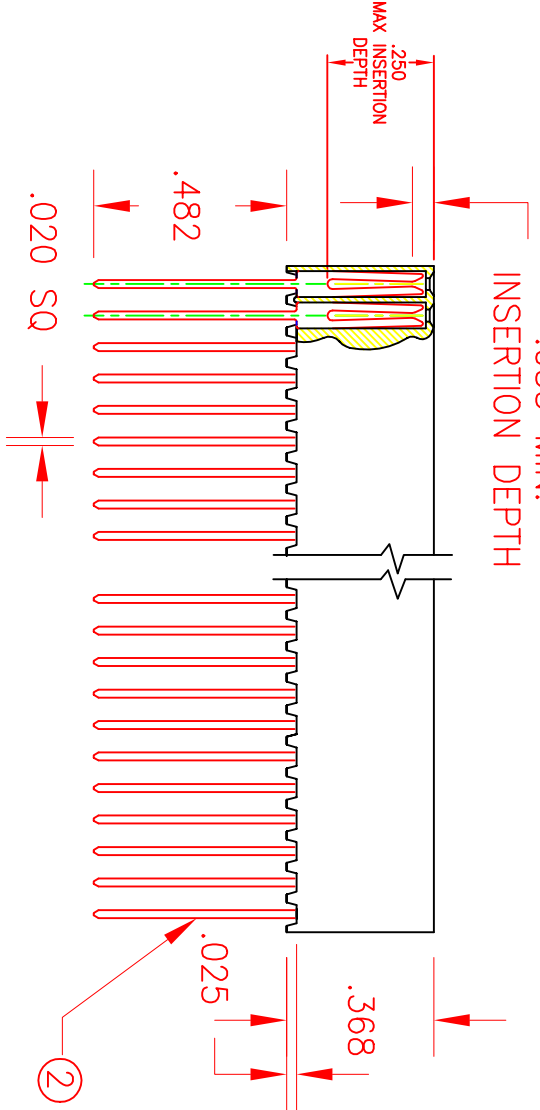


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO CDWV. CDWV, CONNECTIONS, AND SKIPLINE CANNOT BE USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF THE MANUFACTURER. PRODUCE OR REPRODUCE FOR OTHER PURPOSES EXCEPT AS CDWV. CDWV VARIATION: 3100

REVISIONS				
ECO NO.	REV.	DESCRIPTION	DATE	APPROVED
91XXX	F	UPDATED	07.13.06	

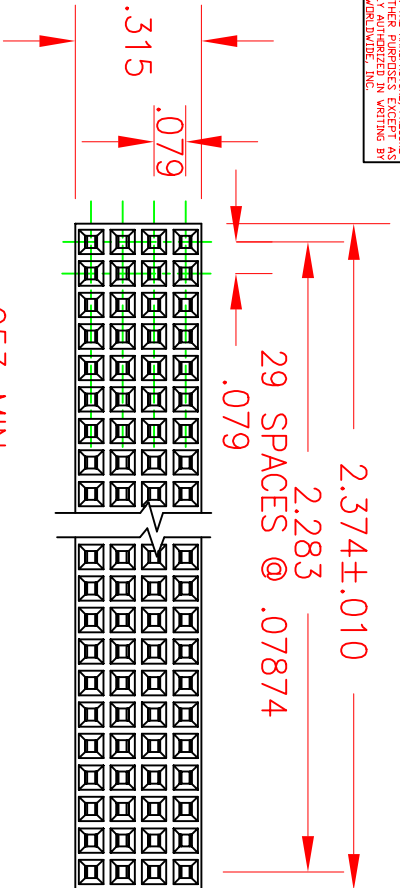

1. MAX NUMBER OF CONTACTS: 120
 2. PLATING: G 3-5 MICRO INCHES OF GOLD MIN PER MIL-G-45204 TYPE II OVER 50 MICRO INCHES OF NICKEL PER QQ-N-290
 3. MATERIALS: INSULATORS - BLACK, 30% GLASS FILLED THERMOPLASTIC, 94V-0, RATED -65°C TO 250 °C ROHS COMPLIANT XYDAR LCP RESIN: G-930 CONTACT - PHOSPHOR BRONZE, ALLOY 51000
- NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
2	120	P40287-02	2MM TUNING FORK SOCKET
1	1	40343	2MM P, 4 ROW STAMPED INSULATOR SKT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/64 .XX ± .02 ±.XXX ± .010 ±.1°

DRAWN BY: AM DATE: 05.08.01

APPROVED: DATE:

TITLE: 2MM P, 4 ROW STAMPED SOCKET PC/104-PLUS

CAT. NO: 1242-XXXX

SCALE: 2:1

SIZE: A

TOOL NO:

30265

REV: F

SHEET 1 OF 1



COMM CON WORLDWIDE, INC.
a subsidiary of
INTERCONNECT SYSTEMS INC.